

Forwarder 574E & 594E



With the operator in focus

Eco Log's new range of E-forwarders are developed with the operator in focus. The E Series has been fitted with a completely new driver cabin where space, comfort and visibility are prioritized – everything so that you can work both comfortably and efficiently.

The new E Series is also equipped with Volvo Penta D8 engines that are characterized by high performance, reliability, fuel efficiency and low emission levels.

Read more about our E-forwarder at ecologforestry.com

Loader

574	FC12	120 kNm	8 m	8,5 m	10 m
	FC16	165 kNm	8,5 m	10 m	
594	FC16	165 kNm	8,5 m	10 m	

3000h/
2 year
warranty*

* Which ever is reached first.
Depending on country,
this may be optional.



IQAN MD4

The IQAN control system has been improved with more integrated features. The new device has a larger 7 inch touch screen.





SERVICE FRIENDLY

- Gathered service points and easy access to key components.
- The frame is equipped with a plate that can easily be disassembled.
- Electric cabin tilt as an optional extra

Spacious cabin



Smart solutions



ENGINE


The Eco Log E-forwarder is powered by Volvo Penta D8 engines that are characterized by high performance, reliability, fuel efficiency and low emission levels.



WIDE RANGE OF ACCESSORIES

The 574E can be equipped with extras such as, utility blades and brush guard.

Loading area (m²)

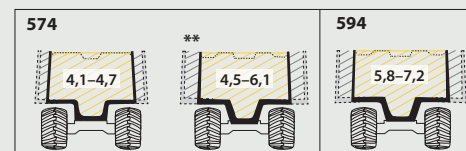


LOADING AREA

The well-developed loading area ranges from 4.1 m² to 7.2 m²

** 4.5-5.2 m² with mechanically adjustable load

Specifications

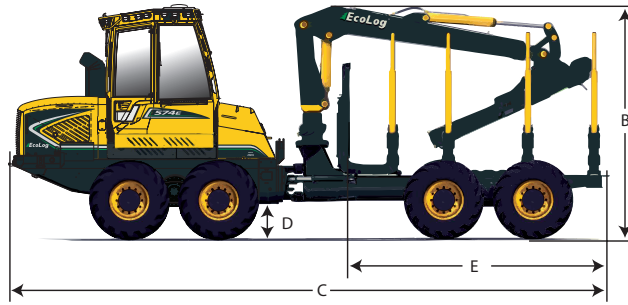

574E

594E

Loading capacity, kg	14 000	20 000
Dimensions		
Weight, kg	18 000	20 300
Width (A), mm	2 640 ⁽¹⁾	3 075 ⁽¹⁾
Height (B), mm	3840	3930
Length (C), mm	10055 / 11140 ⁽²⁾	10535 / 11195 ⁽²⁾ (11790) ⁽³⁾
Ground clearance (D), mm	650	720
Loading area (E), mm	4 414 / 5 555 ⁽²⁾	4 815 / 5 475 ⁽²⁾ (6070) ⁽³⁾
Approach angle, °	40	40
Engine, Volvo Penta		
Type	6 cyl. 871 D8 - 7.7 l	6 cyl. 873 D8 - 7.7 l
Stage	Euromot 4	Euromot 4
Power, hp	252	320
Torque, Nm	1115 @ 1160 rpm	1300 @ 1310 rpm
Fuel tank, l	220	220
Transmission		
Type	Hydrostatic mechanical	Hydrostatic mechanical
Tractive effort, kN	195	245
Speed, km/h	20	20
Hydraulic		
Pump, cc	140 (opt. 180)	180
Pressure, bar	235	235
Hydraulic tank, l	180	180
Wheels		
Standard	600/55-26.5"	750/55-26.5"
Option	710/45-26.5" 800/40-26.5"	750/45-30.5" 710/50-30.5"
Loader - Cranab		
Lifting force, kNm (standard)	120	165
Reach alternatives, m (standard)	8.0/8.5/10	8.5/10
Lifting force, kNm (option)	165	-
Reach alternatives, m (option)	8.5/10	-

⁽¹⁾ With standard wheels; ⁽²⁾ Depending on rear frame length; ⁽³⁾ Max length with hydraulic extension.

© Eco Log Sweden AB. We reserve the right to make changes in product specifications without prior notice.
Some data presented in this document may be theoretical in nature. Pictures and texts are not contractual.